


SABRE SAW PALLET EXPANDER

- PNEUMATIC

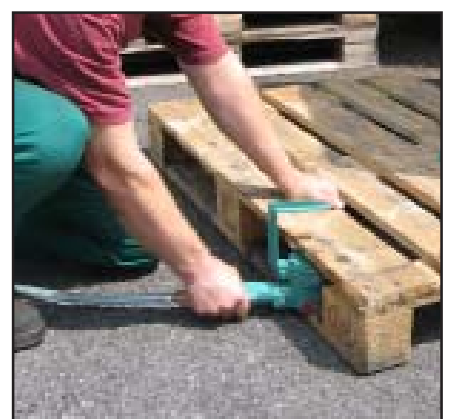

TECHNICAL SPECIFICATION / ACCESSORIES

SABRE SAW Type 5 1217 0010



PALLET EXPANDER Type 7 2510 0010



| SABRE SAW | Cutting capacity | | Power Motor | Stroke | Number of strokes | Air consumption | Vibration level | Sound level | Connection | ID of hose | Weight |
|--------------------------------|------------------|-------|-------------|--------|-------------------|---------------------|------------------|-------------|---------------|------------|--------|
| | Wood | Steel | | | | | | | | | |
| Part No. | mm | mm | kW | mm | 1/min | m ³ /min | m/s ² | dB(A) | | mm | kg |
| 5 1217 0010 | II2GcT5 | 160 | 1.0 | 28 | 1800 | 1.3 | 2.2 | 82.5 | R 1/2" female | 13 | 3.95 |
| 5 1218 0010¹ | IM2cT5 | 160 | 1.0 | 28 | 1800 | 1.3 | 2.2 | 82.5 | Rd 32x1/8" | 13 | 6.90 |

¹ For use in underground mining. Performance data at an operating pressure of 6 bar.

| PALLET EXPANDER | Operating pressure | Expanding power in N at | | | | | | | | Connection | ID of hose | Weight |
|--------------------|--------------------|-------------------------|-------|-------|-------|-------|-------|-------|-------|---------------|------------|--------|
| | | 1 bar | 2 bar | 3 bar | 4 bar | 5 bar | 6 bar | 7 bar | 8 bar | | | |
| Part No. | bar | | | | | | | | | | mm | kg |
| 7 2510 0010 | 1 - 8 | 365 | 530 | 895 | 1260 | 1625 | 1990 | 2355 | 2720 | R 1/4" female | 9 | 2.6 |

Subject to technical change.

SAW BLADES (All Spitznas saw blades cut on backward stroke. Length of blade (free hand cutting) = Operating length + 60 mm.)

| Part No. | T.P.I. | Length (mm) | Application | |
|-------------|-----------------|-------------|---|--|
| 9 2505 0200 | 6 | 150 | wood, plastics, fast and rough cuts | |
| 9 2505 0210 | 6 | 225 | | |
| 9 2505 0040 | 6 | 280 | | |
| 9 2505 0100 | 10 | 150 | wood with nails, steel, non-ferrous metal, alu up to 5 mm, plastics, stainless steel | |
| 9 2505 0180 | 10 | 200 | | |
| 9 2505 0190 | 10 | 250 | | |
| 9 2505 0020 | 10 | 280 | | |
| 9 2505 0240 | 10-14 | 150 | | |
| 9 2505 0250 | 10-14 | 200 | wood with nails, plastics, steel, non-ferrous metal, high-strength steel, stainless steel | |
| 9 2505 0260 | 10-14 | 225 | | |
| 9 2505 0270 | 10-14 | 250 | universal blade for all metals, wood with nails, for steel pipes and profiles from 2 mm | |
| 9 2505 0120 | 14 | 100 | | |
| 9 2505 0130 | 14 | 150 | | |
| 9 2505 0140 | 14 | 200 | | |
| 9 2505 0150 | 14 | 250 | | |
| 9 2505 0160 | 14 | 280 | | |
| 9 2505 0080 | 18 | 150 | | |
| 9 2505 0060 | 24 | 100 | high-strength steel, non-ferrous metal, alu up to 1,5 mm, steel plates up to 5 mm | |
| 9 2505 0110 | 24 | 150 | | |
| 9 2505 0300 | CARBIDE -TIPPED | 150 | ductile pipes, tar-coated pipes | |
| 9 2505 0310 | CARBIDE -TIPPED | 228 | | |
| 9 2505 0320 | CARBIDE -TIPPED | 250 | | |

Accessories (more accessories on request)

| Part No. | Description |
|-------------|--|
| 5 1217 9500 | Clamp up to 100 mm for rectangular cuts |
| 9 2406 0260 | Portable service unit with pressure regulator 3/4" |
| 9 2406 0630 | Portable service unit with protection housing 1/2" |
| 9 9910 0070 | Carrying case for Type 5 1217 |



SPITZNAS

Maschinenfabrik GmbH, Fellerstraße 4, D-42555 Velbert, Germany
 Tel: +49-(0)2052-605-0 Fax: +49-(0)2052-605-29
 Email: sales@spitznas.com Internet: http://www.spitznas.com